



Netgear WGR614v9 Motherboard Replacement

This guide will give you access to the motherboard which will allow you to repair or replace inoperative parts of the router.

Written By: Ryan Murphy



INTRODUCTION

This guide will allow you to separate the motherboard from the lower case.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [T8 Torx Screwdriver](#) (1)
-

Step 1 — Lower Case



- ⓘ Rotate the device so that the bottom is facing up.

Step 2




- Lift up all four rubber pads on the bottom of the router with the plastic opening tool.
- ⓘ Be careful not to pull the rubber pads all the way out when lifting as they are difficult to reinsert.

Step 3




- Unscrew the four 11.8 mm T-8 torx screws from the bottom of the router.

Step 4

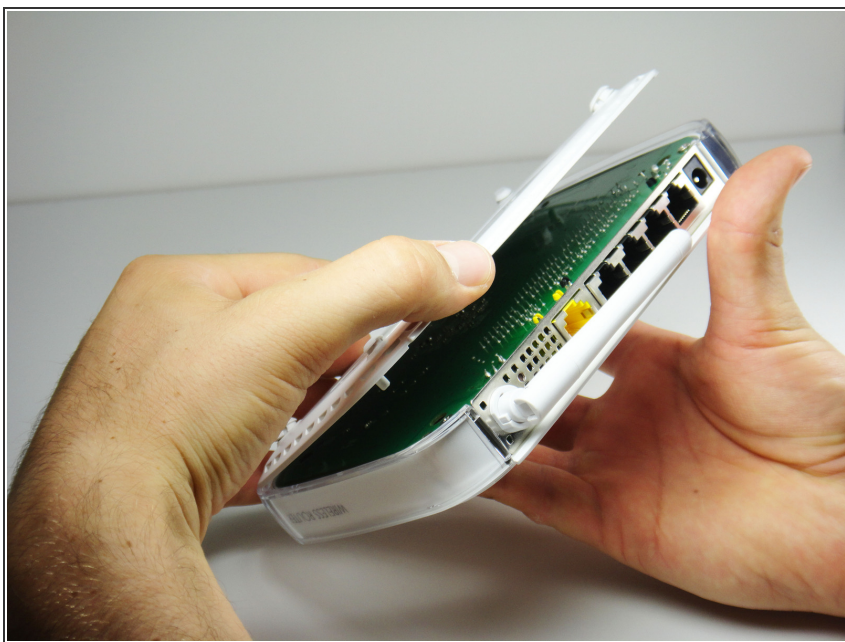


- Lift the bottom casing straight up from the router.

Step 5 — Motherboard

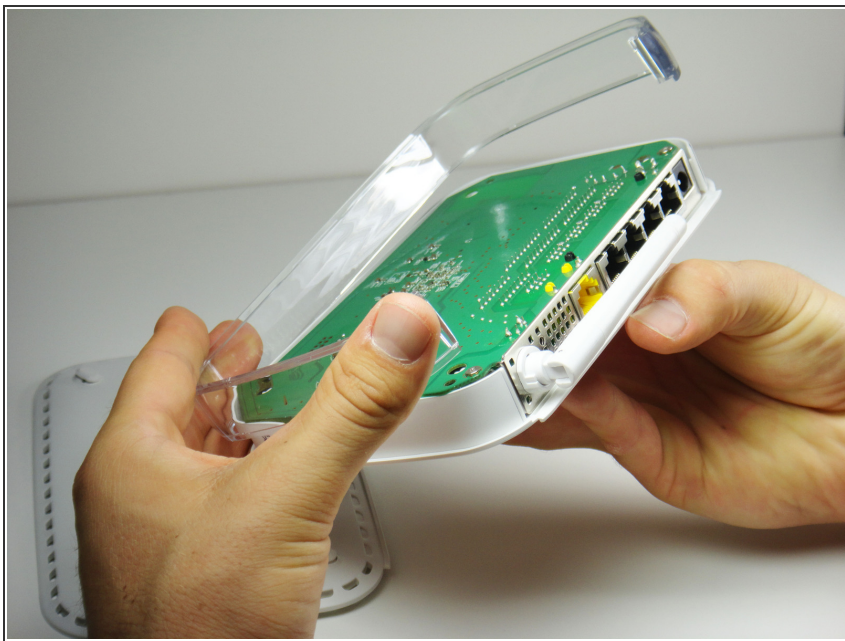

- Remove the clear plastic casing by lifting it straight up from the router.

Step 6

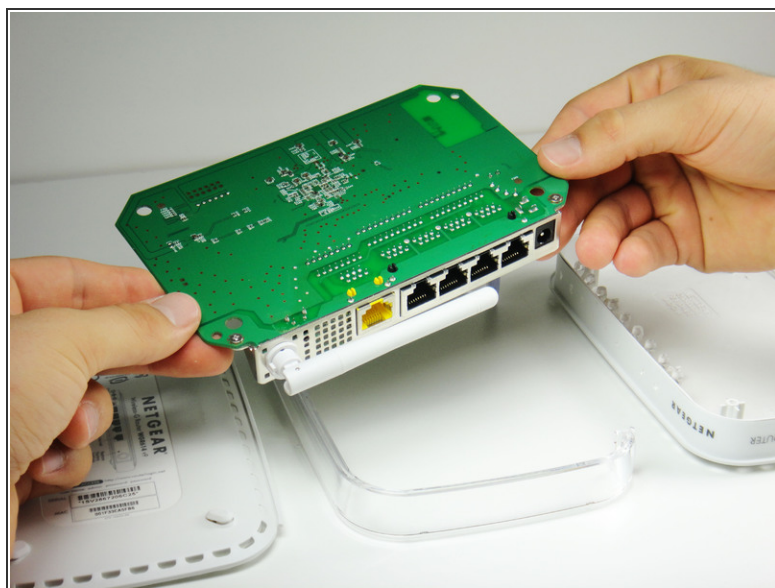

- Separate the motherboard from the top shell by lifting it straight up from the router.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 07:10:16 AM.

